

[DATASHEET](#)
[MSDS](#)
[CERTIFICATION](#)

Correx® Board

Temprotech provide shipyards, contractors and outfitters with flame retardant protection products that meet the exacting demands of the Shipbuilding, Shiprepair and Offshore markets.


Protecting floors, surfaces or equipment and maintaining clean work environments are essential to the successful progress and completion of new building or installation projects and during periods of maintenance, repair or refurbishment.

Flame retardant protection materials can reduce dirt, spillages overspray and accidental damage, and eliminate fire hazards for a safer working environment, saving time and money on clean-up, replacement and repairs before handover.

Brand leading Correx® is extruded from flame retardant polypropylene into a wide range of weights, grades and custom sizes of fluted board.

It provides an extremely versatile form of protection offering light through to heavy duty compression and impact resistance for floors, walls, doors and horizontal surfaces. Correx® is light, clean, easy to work with and can be re-used, giving a cost effective alternative to traditional wood products.

Custom-designed die-cut protection boxes manufactured from Correx® board provide quick and efficient protection for high volume items and superior protection for high value equipment.

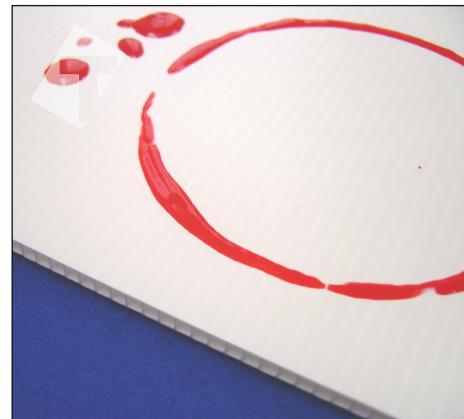

Part No.	CAPABILITY	STANDARD ITEMS			
		TPT3270BS	TPT3350BS	TPT3450BS	TPT38700BS
Thickness	2.0mm - 10.0mm	2.3mm	2.6mm	3.0mm	4.0mm
Density	250g/m ² - 1500g/m ²	270g/m ²	350g/m ²	450g/m ²	700g/m ²
Sheet Width	-	1.0m or 1.22m	1.0m or 1.22m	1.0m or 1.22m	1.0m or 1.22m
Sheet Length	-	2.0m or 2.44m	2.0m or 2.44m	2.0m or 2.44m	2.0m or 2.44m
Sheet Area	-	2.0m ² or 3.0m ²			
Sheet Weight	-	0.54kg or 0.81kg	0.70kg or 1.05kg	0.90kg or 1.35kg	1.40kg or 2.10kg
Sheets per Pallet	-	500	333	333	250
Colour	White, Black, Colour	White	White	White	White
Approvals	LPS1207 Cert. 227a	LPS1207 Cert. 227a	LPS1207 Cert. 227a	LPS1207 Cert. 227a	LPS1207 Cert. 227a NFPA701

